


Hoppe
Schwingtechnik GmbH

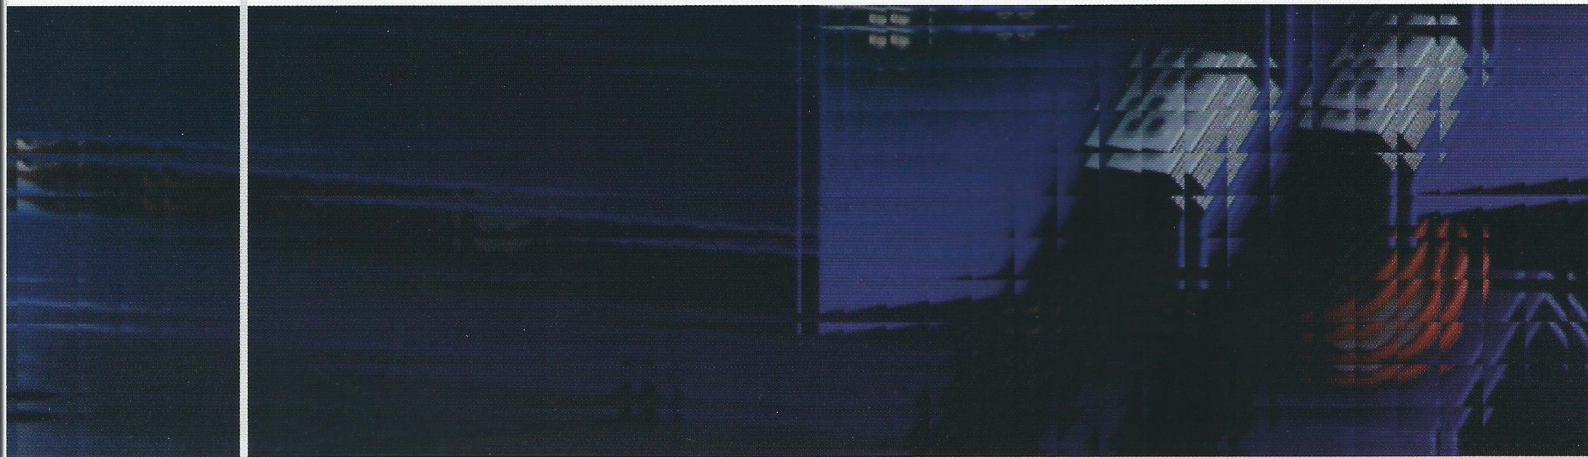

Hoppe Schwingtechnik GmbH

Oberndorferstrasse 52 B – D-64347 Griesheim (Germany)

Tel.: +49 (0) 61 55 / 8310-106 Fax: +49 (0) 61 55 / 8310-107

hoppe@hoppeschwingtechnik.de/www.hoppeschwingtechnik.de

Shake Out HAO

- Driver-Exciter above the machine
- Sand feed rate to 300t/h
- Customizable and flexible grid
- Optional thermo zone against sand cake
- Length 3000,4500,6000,7500
- Width 1000,1200,1400,1600,1800
- other Dimension on request



Shake Out HAU

- Driver-Exciter under the machine
- Sand feed rate to 300t/h
- Customizable and flexible grid
- Optional thermo zone against sand cake
- Length 3000,4500,6000,7500
- Width 1000,1200,1400,1600,1800
- other Dimension on request



Casting Cooler HCC

- Cooling capacity to 40t Casting/h
- Thermodynamic construction
- Robust Eccentric Drive
- Optional with Air Speed Injection
- Length to 35m as individual machine
- Width 1400,1600,1800,2000,2200,2400
- other Dimension on request




Sand Cooler HSK

- Cooling capacity to 120t/h
- Computer-aided construction
- Optimised special conidur grid
- Special nozzles for water dosing
- Length to 12m
- other Dimension on request



Feeder with Unbalance Motor HFU

- Feeder for Sand and Casting at best price.
- Optional with wear-resisting plate, screen deck
- Drive with easy-operatable Unbalance Motor
- Length to 8m
- other Dimension on request

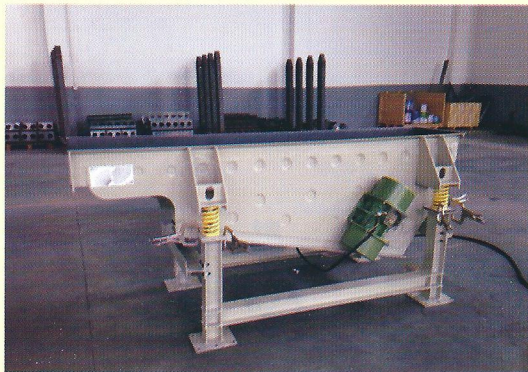

Feeder with Exciter HFR

- Drive with Exciter
- Sand capacity to 300t/h
- Suit for manipulator
- Length 3000,4500,6000,7500
- other Dimension on request



Vibrating Feeder HSF

- Length to 35m
- Optional with Sandwich construction for quiet workshop
- Vibration isolation by two mass systems
- Robust Eccentric Drive
- Dimension on request



Charging Car HCR

- For furnace from 1t to 16t
- Forward and sided moveable
- manual or automatic operation
- Dimension on request



Screening Machine HLS

- Screening Capacity to 1000t/h
- With Exciter above or under the machine
- Temperature screening material up to 900°C



Curve Feeder HKF

- For Casting transport
- Optional with cover
- 90° to 180°



Our Customers

